

Pump **SS SERIES**

BEST OPTION FOR SMALLER PLUMBING

For the small size residential pools or above-ground pools



1. 1.5 inch suction and discharge port with transparent lid
2. Asynchronous, Two poles motor
3. Class insulation: 130(B)
4. IPX5 Waterproof standard
5. Built-in thermal protection
6. Overload protection
7. External heat sink
8. Available in 50Hz or 60Hz with 220V/110V
9. Special design union compatible for both Imperial and Metric measurement standard
10. S.S. 316 Shaft
11. S.S. 316 Mechanical seal

 **Emaux**
water technology


Pool & Spa Equipment




www.emauxgroup.com

SS SERIES PUMP

Technical Information:

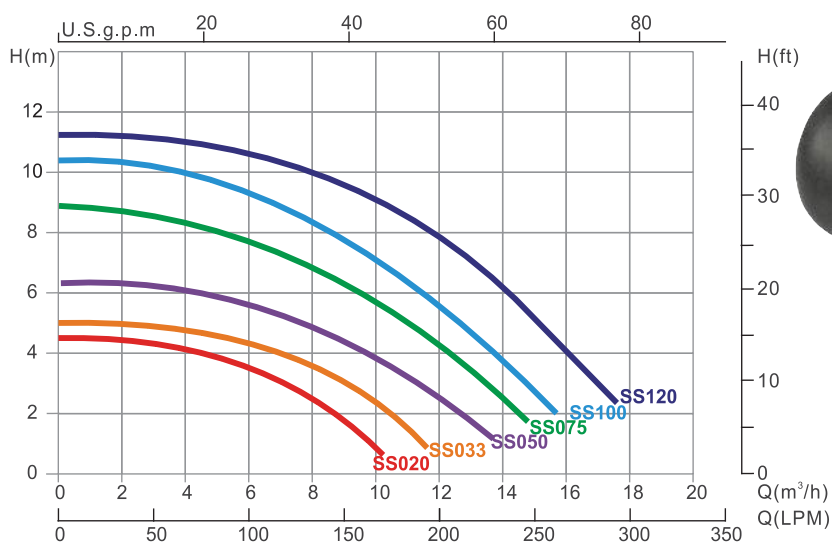


Remark: The performance curve above is for 50Hz models

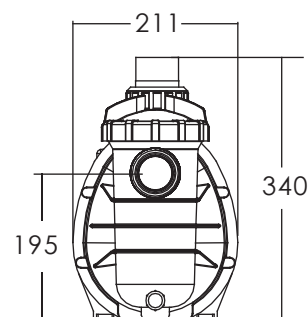

Product Information and Dimension:

Model 50Hz	Input (kW)	Current (AMP)	Noise (dB)	Head (m)			
				2	4	6	8
SS020	0.28	1.5	55	8.4	4	--	--
SS033	0.43	2	55	10.4	7	--	--
SS050	0.55	2.5	60	12.4	10	4	--
SS075	0.75	3.5	60	14.4	12.2	9.4	5
SS100	0.90	4.7	65	15.2	13.8	11.4	8.4
SS120	0.97	5.8	65	18	16	14	12

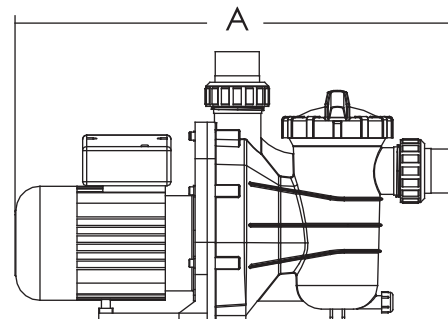

Code 220V/50Hz	Code 110V/60Hz	Model	Connection Size	Horsepower	Weight(kg)	Capacitance 220V	Capacitance 110V	A mm
88022401	88022601	SS020	1.5" / 50mm	0.2hp	6.20	5μF	20μF	507
88022402	88022602	SS033	1.5" / 50mm	0.33hp	6.50	6μF	24μF	507
88022403	88022603	SS050	1.5" / 50mm	0.5hp	8.03	8μF	30μF	552
88022404	88022604	SS075	1.5" / 50mm	0.75hp	9.01	14μF	40μF	552
88022405	88022605	SS100	1.5" / 50mm	1.0hp	9.09	20μF	60μF	552
88022406	88022606	SS120	1.5" / 50mm	1.2hp	11.00	20μF	60μF	552

EMAUX WATER TECHNOLOGY CO., LTD

ADDRESS G/F 41 TIN HAU TEMPLE ROAD,
NORTH POINT, HONG KONG
PHONE +852 2832 9880
www.emauxgroup.com

Pool & Spa Equipment

STRIVE FOR CLEAR WATER

Available from:

ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE
© 2018 EMAUX WATER TECHNOLOGY CO., LTD. ALL RIGHTS RESERVED.